

MEP720-T132-GB

N-Type TOPCon-132cell-G12 Monofacial

0~+5W
Positive Power Tolerance

23.2 %
Maximum Efficiency

695-720W

10-30% Additional Power Generation
30 years lifespan brings 10-30% additional power generation


Zero LID
N-type solar cell has no LID naturally which can increase power generation

Lower LCOE
Up to 25% more power generation in bifacial type (depending on Albedo)

Better Weak Light Performance
Higher power output even under low-light environment like on cloudy or foggy days

Lower Temperature Coefficient
Better performance of the solar panel in higher temperature environment or hot days

More Weather Resistance
Resistant to harsh environment such as salt, ammonia, sand, high temperature and high humidity

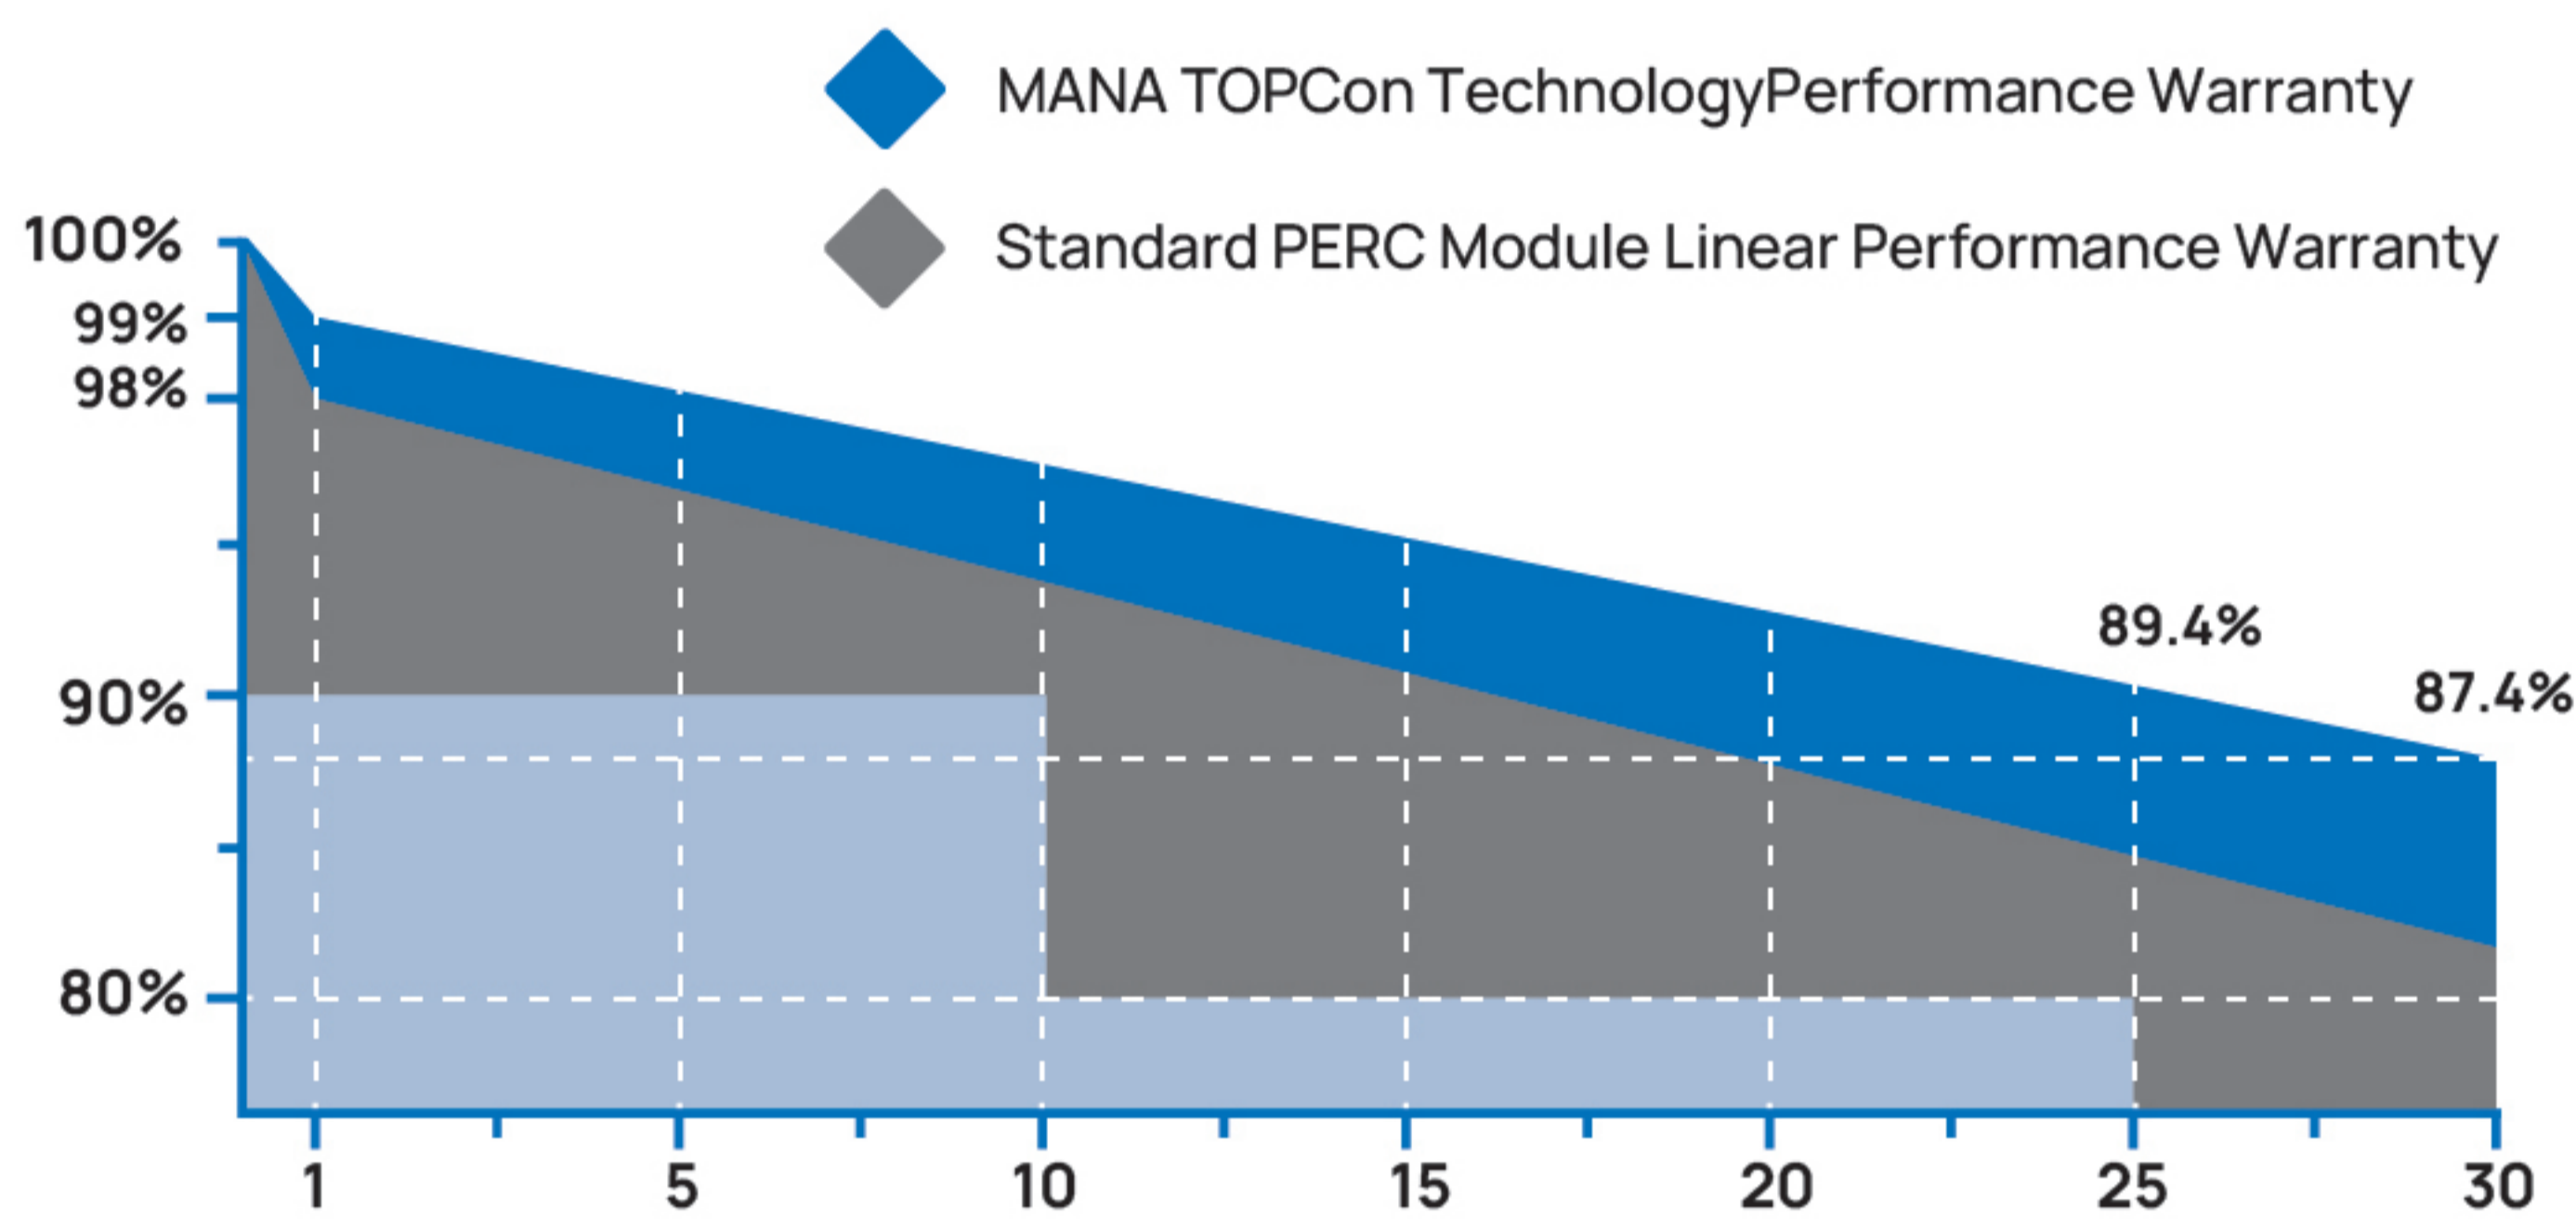


Mana Energy's Certificates

TUV Certificate IEC 61215: 2021
TUV Certificate IEC 61730: 2016
TUV Certificate IEC 61730: 2023
CE Certification (EN 61730:2018)
UKCA Certification (EN 61730:2018)
CEBEC Certification (IEC 61215: 2021 / IEC 61730: 2023)
ISO 9001:2015: Quality management system
ISO 14001:2015: Environmental management system
ISO 45001:2018: Occupational health and safety management system






30 YEARS	Performance Warranty	12 YEARS	Product Warranty
--------------------	--------------------------------	--------------------	----------------------------

Current-Voltage Curve 720W

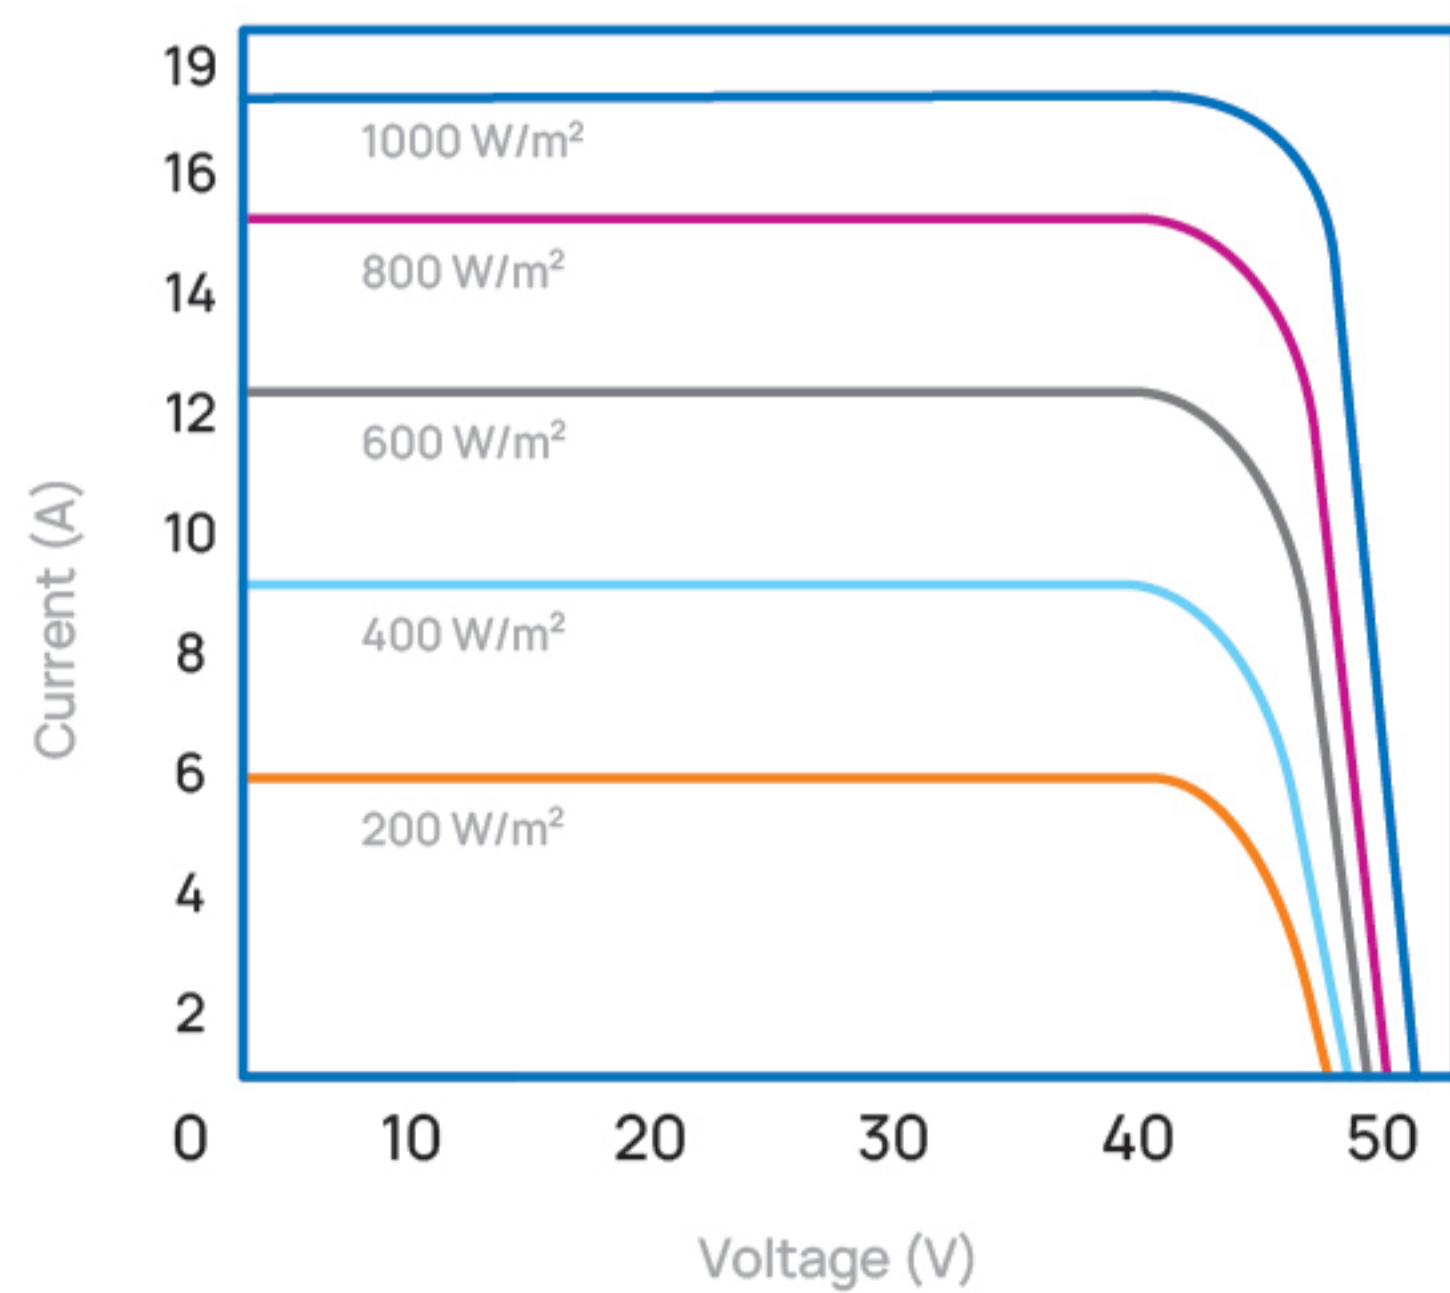

Power-Voltage Curve 720W

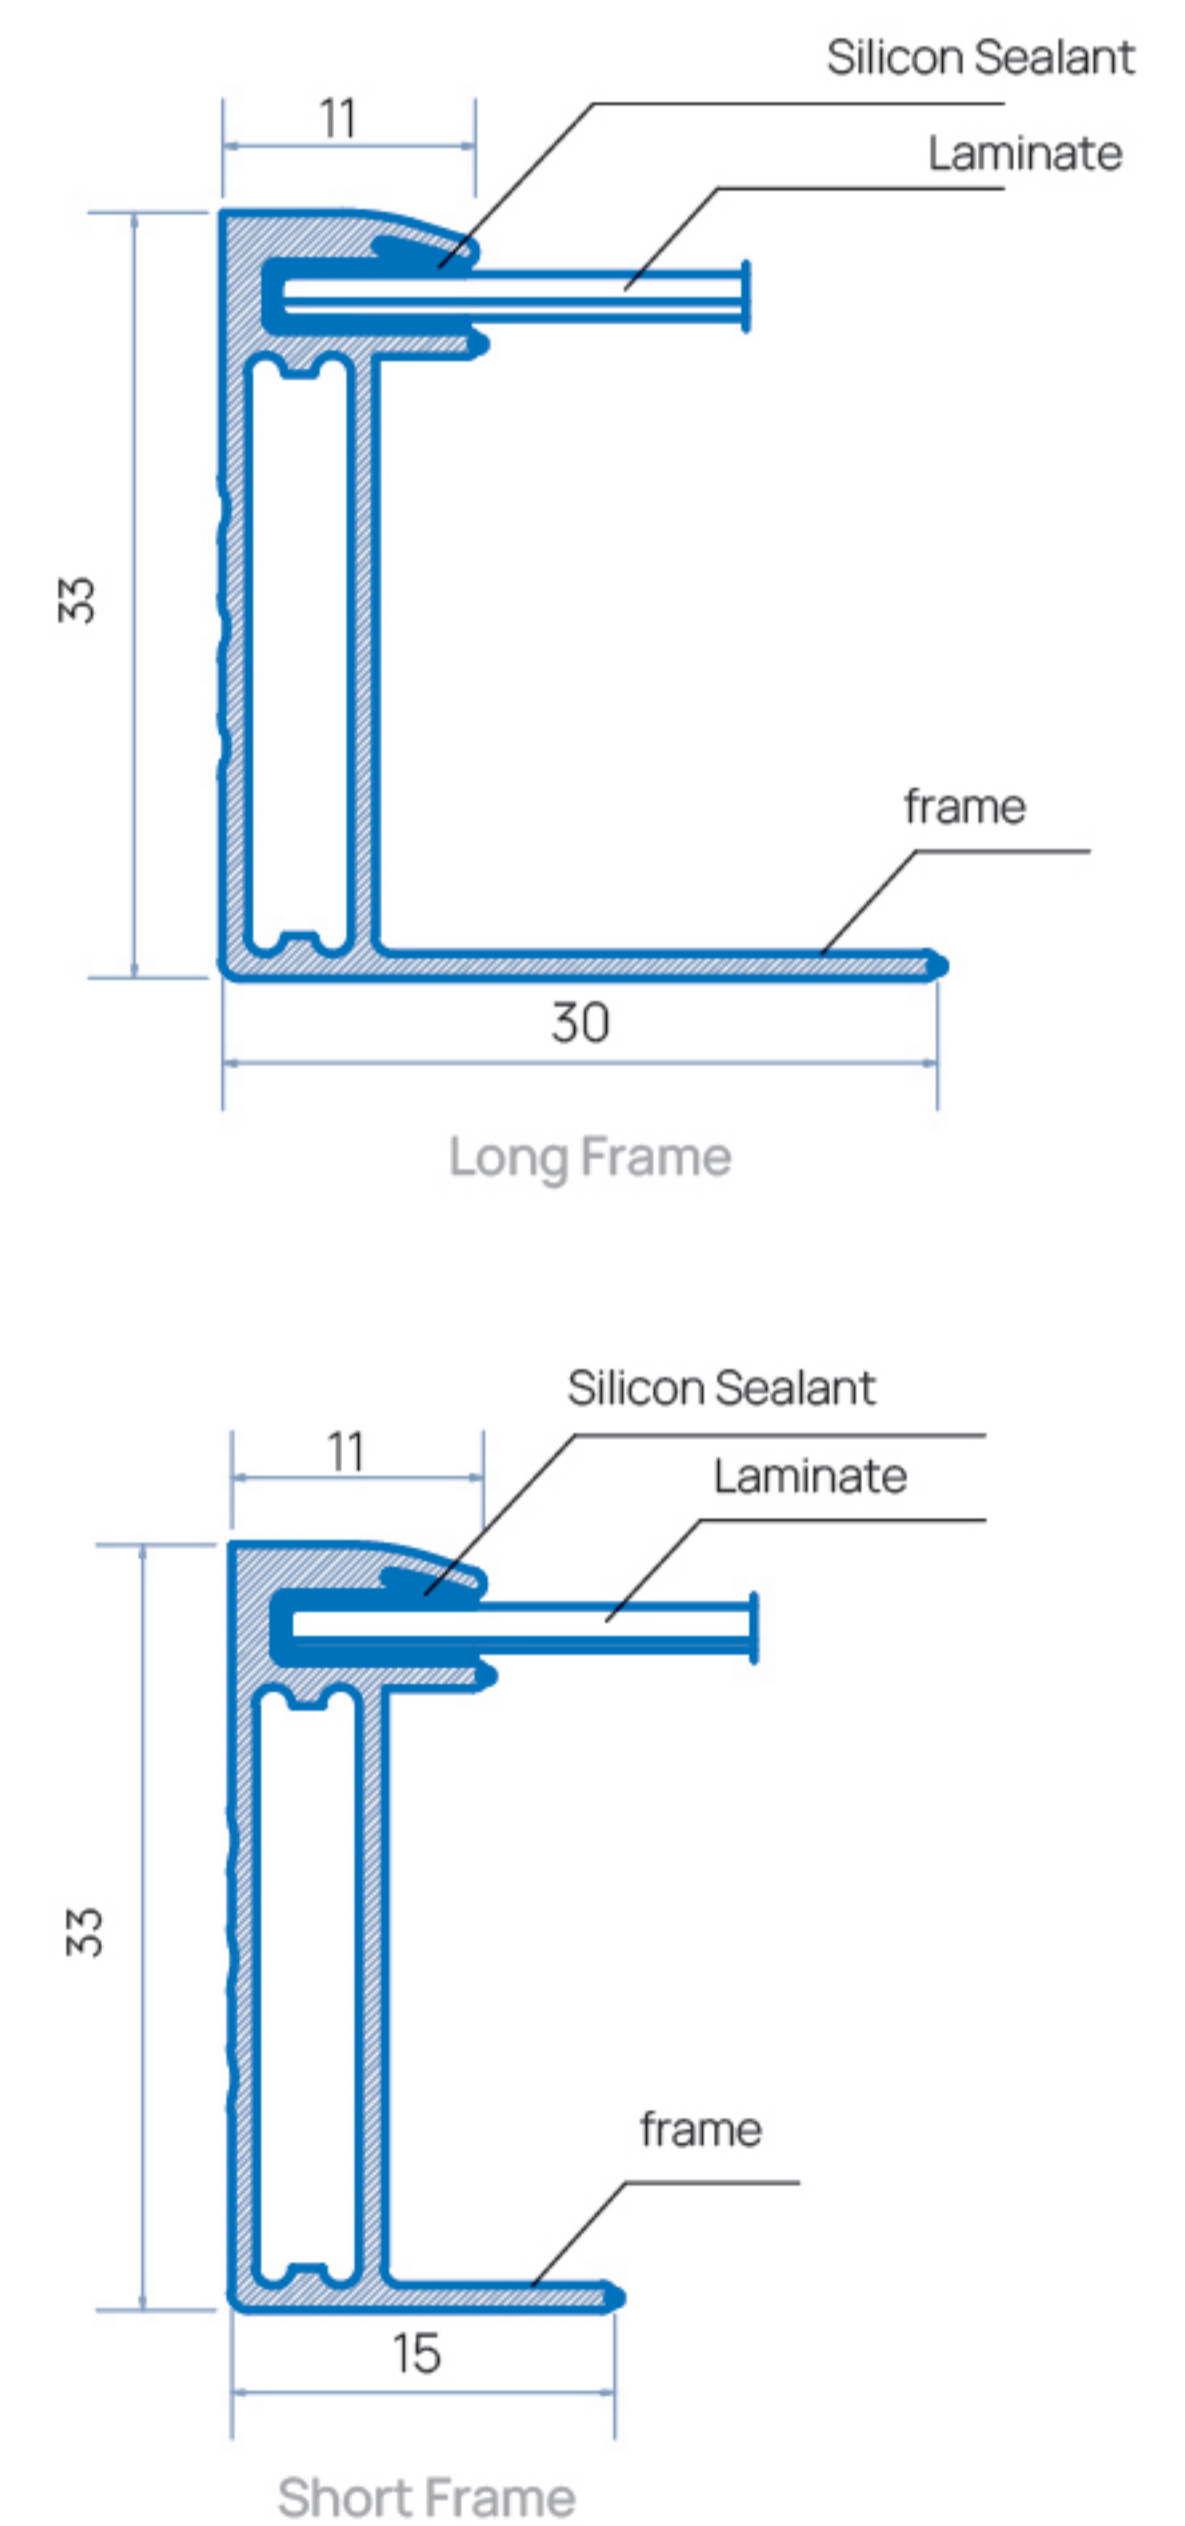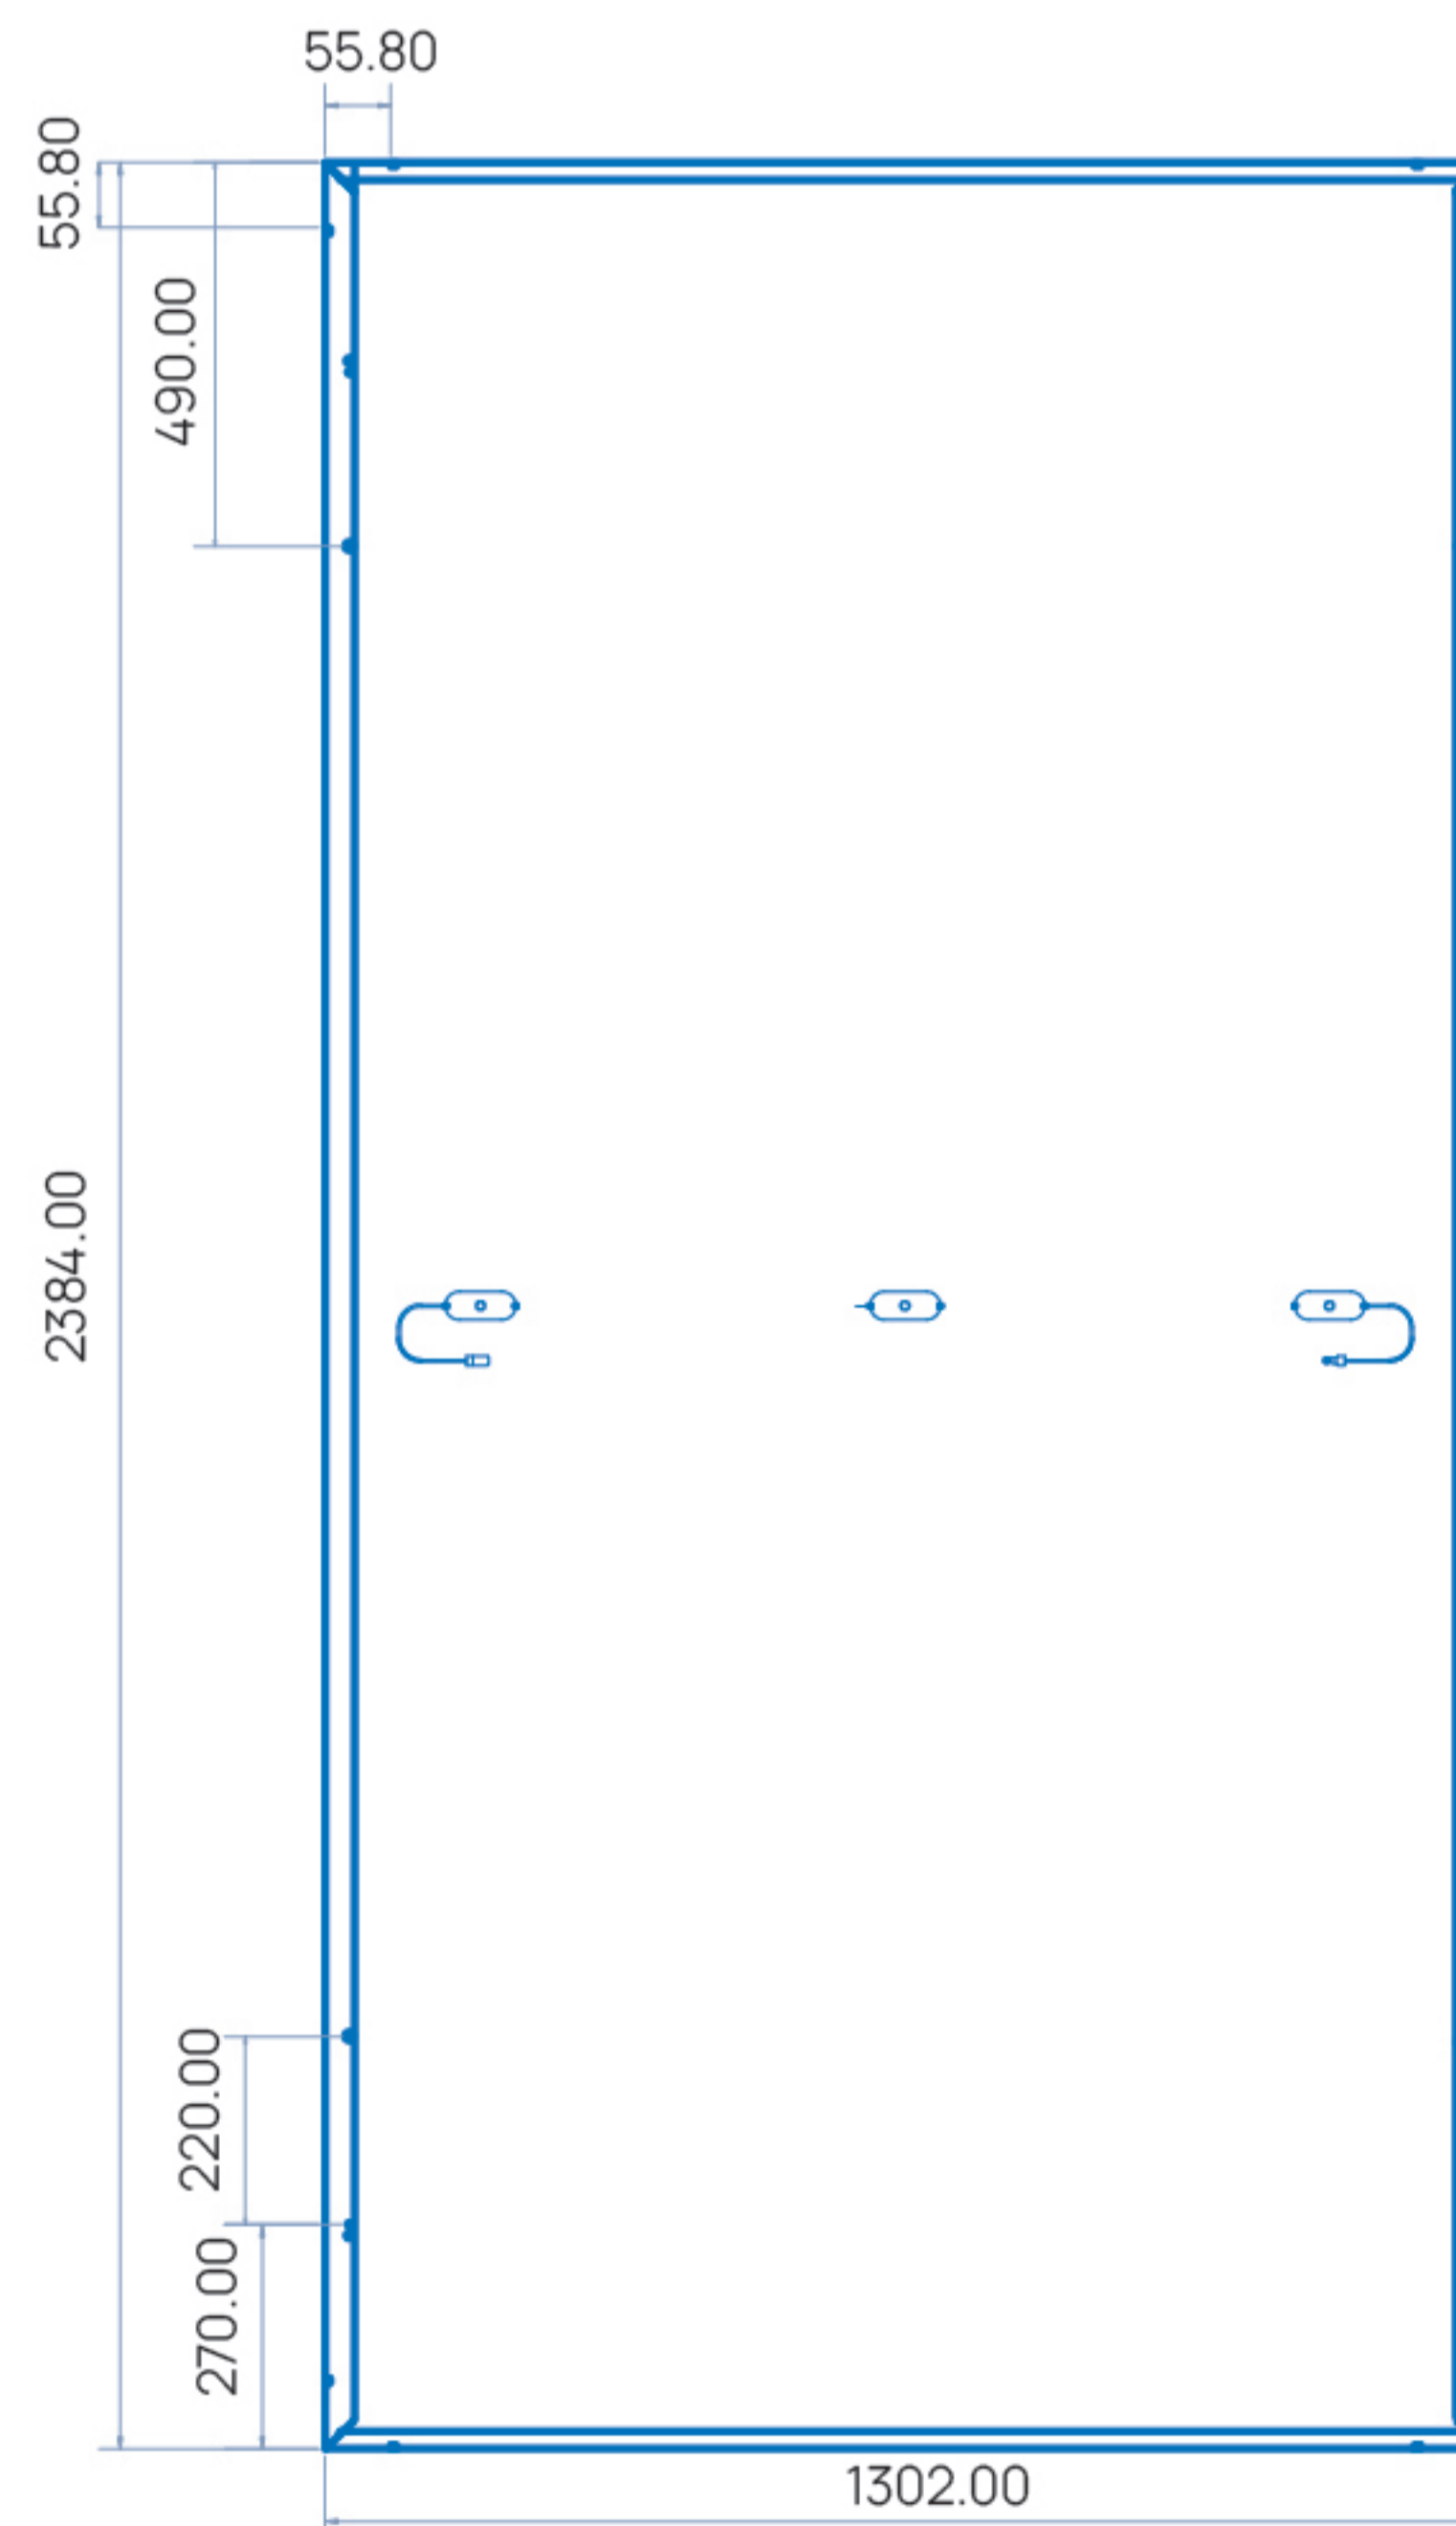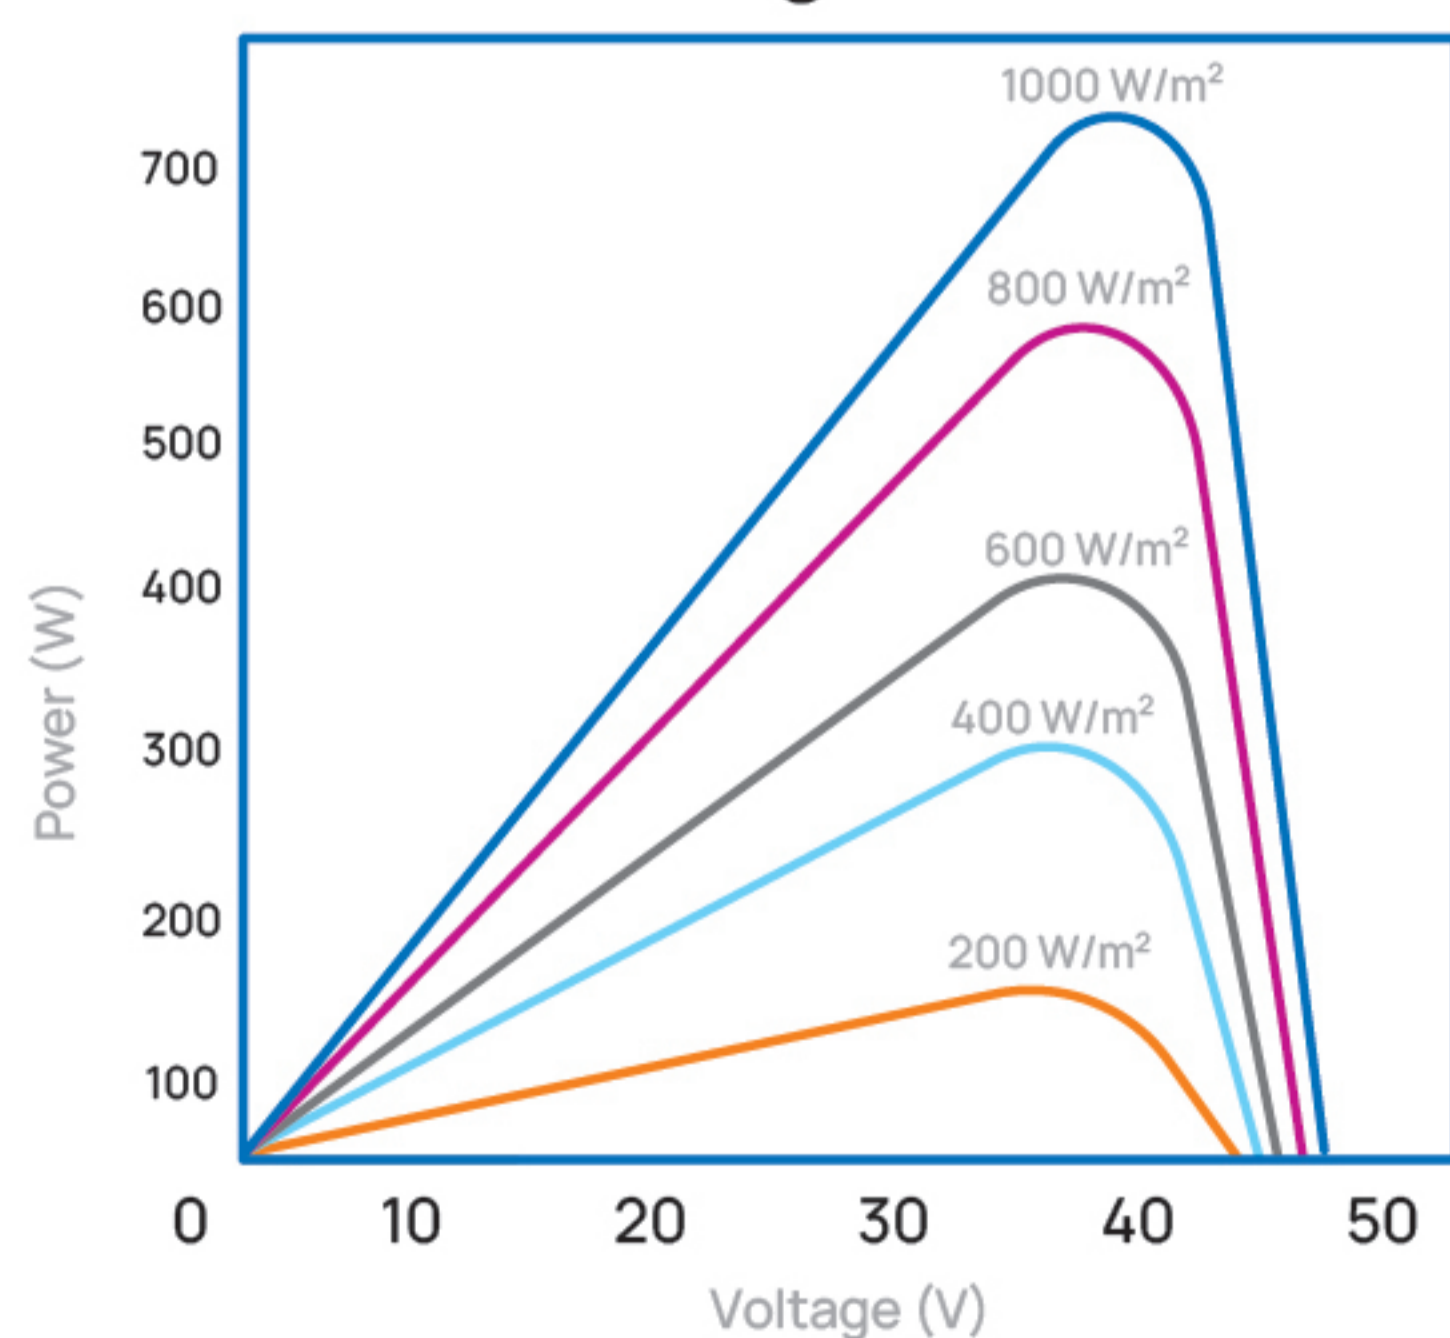

Caution

To operate, install and manage Mana Energy Modules, read the installation manual and use carefully.

Observation

This datasheet is subject to change without notice due to continuous improvement of our products. You can find all records of the updates on our website www.manaenergypak.com or by contacting one of our sales staff. All rights reserved @Mana Energy.

MEP720-T132-GB

Electrical Specification (STC) - Front Side			STC: AM1.5 1000W/m ² 25°C [Test Uncertainty: ±3%]					
Model			MEP 720-T132-GB 695	MEP 720-T132-GB 700	MEP 720-T132-GB 705	MEP 720-T132-GB 710	MEP 720-T132-GB 715	MEP 720-T132-GB 720
Max Power	Pmp	[W]	695	700	705	710	715	720
Max Power Voltage	Vmp	[V]	41.30	41.48	41.66	41.84	42.02	42.20
Max Power Current	Imp	[A]	16.87	16.92	16.97	17.02	17.07	17.12
Open Circuit Voltage	Voc	[V]	47.63	47.81	47.99	48.17	48.35	48.53
Short Circuit Current	Isc	[A]	17.73	17.77	17.81	17.85	17.89	17.93
Efficiency		[%]	22.4	22.5	22.7	22.9	23.0	23.2

Electrical Specification (NMOT) - Front Side			NMOT: 800W/m ² 20°C Wind: 1m/s [Test Uncertainty: ±3%]					
Max Power	Pmp	[W]	525	528	531	535	538	542
Max Power Voltage	Vmp	[V]	36.84	37.00	37.16	37.32	37.48	37.64
Max Power Current	Imp	[A]	14.24	14.27	14.30	14.33	14.36	14.39
Open Circuit Voltage	Voc	[V]	44.84	45.00	45.16	45.32	45.48	45.64
Short Circuit Current	Isc	[A]	15.15	15.18	15.21	15.24	15.27	15.30

Mechanical Data	
Solar Cell	N-Type 210mm × 105 mm - [12 × 11]
Module Dimension	2384×1302×33 mm
Weight	33. kg
Front Cover	Glass - 3.2mm Semi Tempered AR coated
Back Cover	White Backsheet
Frame	Silver - Anodized Aluminium Alloy
Junction Box	IP68 Rated - 3 Bypass Diodes
Cable	4.0 mm ² - 300mm

Temperature Ratings				
Temperature Coefficient	Isc	α	[%/°C]	+0.046
Temperature Coefficient	Voc	β	[%/°C]	-0.25
Temperature Coefficient	Pmax	γ	[%/°C]	-0.30
Nominal Module Operating Temperature	NMOT		[°C]	43±2

Operating Properties	
Max System Voltage	1500V
Max System Fuse Rating	30 A
Operational Temperature	-40 to +85 °C
BifacialityTolerance	±5% w

Packaging Information	
# Module Per Pallet	35
# Pallet per 45' HC Container	12
# Pallet per 40' HC Container	10
# PCs per Container 40' HC	350
Pallet Weight (kg)	1160